



CATALOG

*Pavement Maintenance Products | Traffic Safety Products
Geotextile & Erosion Control Products | Drainage Pipe*

TABLE OF CONTENTS

	Page	1-10
Traffic Signs & Posts		
Regulatory Signs	1	
Warning Signs	2	
Parking, Handicap, School, Guide Signs	3	
Residential, Construction Signs	4	
Street Name Signs	5	
Parking Lot Control	6	
Custom Signs	8	
Posts - Square Galvanized, Green U-Channel	9	
Brackets, Hardware - Nuts, Bolts	10	
Traffic Safety Products	Page 11-16	
Traffic Cones, Delineators, Channelizers	11	
Barricades, Legs, Barricade Lights	12	
Roll-Up Fencing	13	
Parking Stops & Speed Bumps, Stop/Slow Paddle & Flags, Portable Sign Bases	14	
Roll-Up Construction Signs, Sign Stands	15	
Pedestrian Crossing Signs	16	
Pavement Marking & Measuring Products	Page 17-20	
Paint- Marking, Striping, Pavement Marking Tape	17	
Stencils- Standard and Custom, Pavement Marking Tools	18	
Pavement Marking Tapes, Pavement Marking Wheels	19	
Thermoplastic	20	
Personal Protection Products	Page 21-22	
Hard Hats, Vests & Pants	21	
Safety Glasses, Gloves	22	
Geotextile & Erosion Control Products	Page 23-28	
Geotextiles- Woven, Nonwoven, Paving Fabric	23	
Sediment Control- Silt Fence, Straw Wattle, Filter Bags, Dirt Bags	24	
Erosion Control- Blankets, Turf Reinforcement Mats	25	
Staples & Applicators, Grass Seed & Fertilizer	26	
Lime & Fertilizer, Hydromulch	27	
Other Landscaping Items, Ice Melt	28	
Drainage Pipe	Page 29-30	
HDPE, Wire Mesh Gabions	29	
Corrugated Metal Pipe	30	
Pavement Maintenance Products	Page 31-38	
Asphalt Sealers - Coal Tar, Asphalt Emulsion, Equinox LN-11, Additives, Primer	31	
Aggregates, Crack Sealants, Cleaning Agents	32	
Asphalt Repair, GeoComposites/Overlay Fabric	33	
Crackfilling Equipment & Squeegees	34	
Sealcoating Equipment	35	
Asphalt/Sealcoating Tools - Brushes, Brooms	36	
Billy Goat Blowers & Grazors, Lutes, Rakes, Tamers	37	
Asphalt Tools - Guages, Edge, Shoes, Scraper Shovels, Line Stripers	38	
Asphalt Maintenance Services	Page 39-40	
Tack/Prime/Seal Application, Joint/Seam Sealing- PG64-22, Rubberized	39	
Crackfilling, Sealcoating, Asphalt Rejuvenation	40	
Rentals	Page 41	
Equipment - Straw Blower, MA-10, 55 Gallon Melter	41	

Regulatory Signs (PennDOT Approved)

0.080 Aluminum 5020-H38
High Intensity Prismatic



R1-1
24, 30, 48



R1-2
36, 48, 60



R1-3P
18 x 6



R1-5L
36 x 36



R1-10P
24 x 18



R2-1
24 x 30



R3-1
24 x 24



R3-2
24 x 24



R3-3
24 x 24



R3-4
24 x 24



R3-7L
30 x 30



R3-7R
30 x 30



R3-7-1L
30 x 30



R3-7-1R
30 x 30



R3-8A
36 x 30



R3-8B
48 x 30



R3-9CP
24 x 12 30 x 15



R3-9DP
24 x 12 30 x 15



R3-8A
30 x 30



R4-1
24 x 30



R4-7
24 x 30



R4-7B
24 x 30



R5-1
24 x 24 30 x 30




R5-1A
36 x 24



R5-2
24 x 24



R5-2-3
24 x 18



R5-2-4
24 x 12



R6-1L & R6-1R
36 x 12




R6-2L
18 x 24



R6-2R
18 x 24



R7-100
24 x 24 48 x 48



R7-301(S)
12 x 6



R7-301(D)
12 x 6



R9-3
18 x 18



R10-6AL
24 x 30



R10-10L
24 x 30



R10-10R
24 x 30



R11-2
48 x 30



R11-2-1
48 x 30



R11-3A
60 x 30



R11-3B
48 x 12



R11-4
60 x 30



R12-1
24 x 30



R12-1-2
24 x 12



R12-5A
24 x 18



R22-1
48 x 36

Warning Signs (PennDOT Approved)0.080 Aluminum 5020-H38
High Intensity PrismaticW1-8
18 x 24W2-1
30 x 30W2-2
30 x 30W2-4
30 x 30W3-1
36, 48W3-2
36, 48W3-3
36, 48W3-5
36 x 36W5-2
36 x 36W5-3
36 x 36W8-1
30 x 30W8-5
30 x 30W10-1
36 DIAW11-2
30, 36, 48W11-3
30 x 30W11-4
30 x 30W11-5
30 x 30W11-8
30 x 30W11-103
30 x 30W12-2
36 x 36W13-1P
18 x 18W14-2
30 x 30W15-2
30 x 30W16-103P
24 x 18OM1-3
18 x 18OM3-L
12 x 36W1-1L
24, 30, 48W1-1R
24, 30, 48W1-2L
24, 30, 48W1-2R
24, 30, 48W1-3L
24, 30, 48OM3-R
12 x 36W1-3R
24, 30, 48W1-4L
24, 30, 48W1-4R
24, 30, 48W1-6
48 x 24W1-7
48 x 24

Parking Signs (PennDOT Approved)0.080 Aluminum 5020-H38
High Intensity PrismaticR7-2
12 x 18R7-302
12 x 18R7-4A
12 x 18R7-6-1
12 x 18R7-8F
12 x 18R7-13
12 x 18R8-3
12 x 12 24 x 24R7-12DA
12 x 18R7-201AP
12 x 6R7-203-1
18 x 24Handicap Signs (PennDOT Approved)0.080 Aluminum 5020-H38
High Intensity PrismaticR7-8
12 x 18R7-8DA
12 x 18R7-8P
12 x 6School Signs (PennDOT Approved)0.080 Aluminum 5020-H38
High Intensity PrismaticS1-1
30 x 30S5-2
24 x 30S3-1
30 x 30S4-5 (various speeds)
30 x 30W16-7P
24 x 12Guide Signs (PennDOT Approved)0.080 Aluminum 5020-H38
High Intensity Prismatic


D1-1A




D1-3A

Residential Signs (PennDOT Approved)I10-1
36 x 12I10-2
36 x 12I10-3
36 x 12I10-4
36 x 12I10-5
36 x 12CS-1
12 x 18CS-3
18 x 12CS-13
18 x 24**911 Address Signs**


- Great for mailboxes or emergency signs
- Radius corners
- Vertical
- Double sided
- 6" x 18"
- Green only

Construction Signs (PennDOT Approved)W1-3L
36 x 36W1-3R
36 x 36W1-4L
36 x 36W1-4R
36 x 36W3-4
36 x 36W4-2L
36 x 36W4-2R
36 x 36W5-5
36 x 36W8-101
36 x 36W8-8
36 x 36W9-3
36 x 36W14-3
36 x 36W20-1
36 x 36W20-2
36 x 36W20-3
36 x 36W20-4
36 x 36W20-5L
36 x 36W20-5R
36 x 36W20-7
36 x 36W21-2
36 x 36
30 x 30W21-5
36 x 36W21-5BL
36 x 36W21-5BR
36 x 36W21-5-1
36 x 36W21-14
36 x 36W21-16
36 x 36W21-19
36 x 36W21-20
36 x 36W24-1L
36 x 36W24-1R
36 x 36W30-1
1,000 FT & 1,500 FTM4-8
24 x 12M4-8A
24 x 18M4-9L
30 x 24M4-9R
30 x 24M4-9S
30 x 24M4-9SL
30 x 24M4-9SR
30 x 24G20-2
36 x 12
60 x 24G20-2
36 x 180.080 Aluminum 5020-H38
High Intensity Prismatic0.080 Aluminum 5020-H38
High Intensity Prismatic

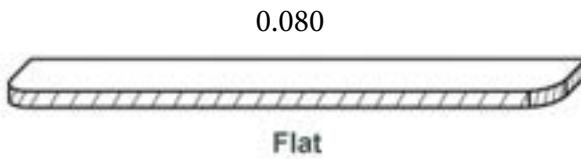
Street Name Signs (PennDOT Approved)
 0.080 Aluminum 5020-H38
 High Intensity Prismatic


0.080

Flat

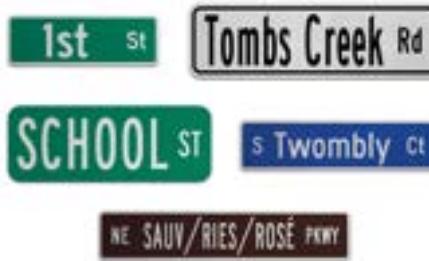

Flat	Height	Sides	Sign Length	Text/Background	
<ul style="list-style-type: none"> • 0.080 Blank (5050-H38 Alloy) • High Intensity Prismatic Sheeting • 1 1/2" Corner Radius • Meets DOT & MUTCD State and Federal Guidelines 	6"	Single or Double Sided	18", 24", 30", 36"	<ul style="list-style-type: none"> • White/Green • White/Blue • White/Brown • Black/White 	
	8"		24", 30", 36", 42", 48"		
	9"				
	10"				

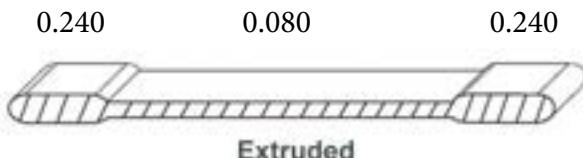

0.240

0.080

0.240

Extruded



Extruded	Height	Sides	Sign Length	Text/Background
<ul style="list-style-type: none"> • 0.080 Middle - 0.240 Top & Bottom (5050-H38 Alloy) • High Intensity Prismatic Sheeting • Square Corners • Meets DOT & MUTCD State and Federal Guidelines 	9"	Double Sided	24", 30", 36", 42"	<ul style="list-style-type: none"> • White/Green • White/Blue • White/Brown • Black/White

**Two-Lane Roads with Speed Limits of
25 MPH or Less**

- 6" Tall Sign Blade
- Flat Blade
 - 6" x Variable lengths (36" MAX)
 - 0.080 Aluminum (No Hole Punch)
 - 3/4" Corner Radius
- Letter Height: 4" Prefix | 4" Primary | 2" Suffix
- Letter Case: Upper/Lower Case
- Letter Font: Highway Gothic B
- Reflective Sides: Single or Double Sided
- Sheeting Type: High Intensity Prismatic

**Two-Lane Roads with Speed Limits of
25 MPH or Greater**

- 8", 9", or 10" Tall Sign Blade
- Flat Blade or 9" Extruded
 - 8", 9", or 10" x Variable lengths (48" MAX)
 - 0.080 Aluminum (No Hole Punch)
 - 3/4" Corner Radius
- Letter Height: 6" Prefix | 6" Primary | 3" Suffix
- Letter Case: Upper/Lower Case
- Letter Font: Highway Gothic B
- Reflective Sides: Double Sided
- Sheeting Type: High Intensity Prismatic

Call for custom logos, seals, and icons

NOTE: No design proofs are provided unless required
NOTE: You should always refer to your local municipality requirements when ordering/installing signs and traffic control devices

Parking Lot Control (Non-PennDOT Approved)

 0.080 Aluminum 5020-H38
High Intensity Prismatic

For use in parking lots & Private roads



18 x 12



18 x 12



18 x 12




18 x 12



18 x 12



18 x 12



18 x 12



18 x 12



18 x 12



18 x 12




18 x 12



12 x 18



12 x 18



12 x 18



18 x 12



18 x 12



18 x 12



12 x 18



12 x 18



12 x 18



12 x 18



12 x 18



12 x 18



12 x 18



12 x 18



12 x 18



12 x 18



12 x 18



12 x 18

Parking Lot Control (Non-PennDOT Approved)0.080 Aluminum 5020-H38
High Intensity Prismatic**For use in parking lots & Private roads**

12 x 18



12 x 18



12 x 18



12 x 18



12 x 18



12 x 18



12 x 18



12 x 18



12 x 18



12 x 18



12 x 18



12 x 18



12 x 18



12 x 18



12 x 18



18 x 12



12 x 18



12 x 18



24 x 18



24 x 18



12 x 18



12 x 18



12 x 18



12 x 18




18 x 12

R1-1
18 x 18R5-1
18 x 18R1-2
2412 x 18 18 x 24
5, 10, 15 MPH

Custom Signs0.080 Aluminum 5020-H38
High Intensity 3M Sheeting

Your Lettering and Logos on these stock signs!

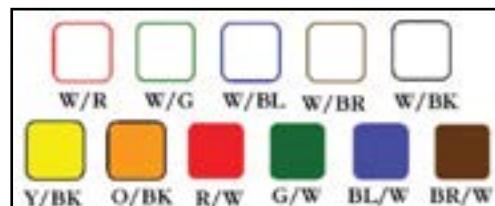Many sizes available from
12" x 6" to 48" x 48"Multiple color
combinations available!**Why Should You Buy Signs from D.B. Krieg?**

All of our signs come with 3M High Intensity Prismatic sheeting that is set on a 0.080 aluminum (5052-H38) blank.



Signs from D.B. Krieg	Vs.	Competitor
<ul style="list-style-type: none"> • 0.080 aluminum blanks with radius corners • 3M High Intensity Prismatic Sheeting - Meets DOT & MUTCD State and Federal Guidelines in all colors for ground mounts - 10 year warranty backed by 3M - 3x brighter than engineer grade • 3/8 prepunched holes • Traffic grade - Alodine treated blank 		<ul style="list-style-type: none"> • 0.063 aluminum blanks • Engineer Grade Prismatic Sheeting - Does NOT meet DOT & MUTCD State and Federal Guidelines - No warranty - Life expectancy of 5-7 years

Posts & Post Reflectors

Our sign posts are the cost-effective, durable answer to mounting traffic signs and parking signs



Square Galvanized Post	Length	Dimensions
<ul style="list-style-type: none"> Approved by the Federal Highway Administration and PennDOT 7/16" holes on 1" centers all 4 sides (full length of post) for easy sign installation Hot dip galvanized to prevent corrosion and rust Signs can be mounted back to back at any height 	<ul style="list-style-type: none"> 8' 10' 12' 	<ul style="list-style-type: none"> 2" x 2" 14 Gauge



Square Post Sleeve	Length	Dimensions
<ul style="list-style-type: none"> Approved by the Federal Highway Administration and PennDOT Compatible with 2" Square Post Breakaway system will snap off at the stub when the post is hit by a vehicle Easily replace damaged sign posts 	3'	<ul style="list-style-type: none"> 2.25" x 2.25" 12 Gauge

*Can be purchased as a complete kit that includes square post, sleeve, 1 corner bolt, and one nut.



Green U-Channel Post	Length	Weight
<ul style="list-style-type: none"> High-tensile steel construction with green baked enamel finish Rust and corrosion resistant Pre-punched holes for easy sign attachment Tapered ends for easy installation 	<ul style="list-style-type: none"> 8' 10' 	<ul style="list-style-type: none"> 2.0 lbs/ft 2.5 lbs/ft



Green U-Channel Base	Length	Weight
<ul style="list-style-type: none"> Post is designed to break away at the stub upon impact Fits 2.5 lbs/ft Upright post Rust and corrosion resistant Pre-punched holes for easy post attachment 	3.5'	<ul style="list-style-type: none"> 2.5 lbs/ft



Galvanized U-Channel Delineator Post	Length	Weight
<ul style="list-style-type: none"> Ideal for light construction applications and maintenance Easy to drive into ground and assemble Hot Dip Galvanized to prevent corrosion and rust Tapered on end for easy installation 	6'	<ul style="list-style-type: none"> 1.12 lbs/ft



U-Channel Post Driver

- Install your u-channel sign posts easily with this drive cap
- To be used with 2# and 2.5# green U-channel posts
- 3" x 2.5" x 3.5"



Square Post Driver

- Protect the top of your square posts from damage during installation and make it easier to drive them into the ground
- Ideal for 2" square posts



Post Reflectors

- Available in Red, Yellow, Lime, White
- Available in 72" & 30" lengths
- Use on U-Channel, square, or round sign posts
- Pre-drilled mounting holes

Brackets

**U-Channel**

- Flat or Extruded
- 90° or 180°
- 12" lengths

**Adjustable Cross**

- Universal mount street sign bracket
- Mount signs at 45° angle or parallel to one another
- Does not do 90° angles

**Square Post**

- Flat or Extruded
- 90° or 180°
- 12" lengths

**Wing Street Sign Bracket**

- Flat or Extruded
- Bracket straps or bolts to a wall or pole
- Die cast aluminum construction
- 1/8" thick slot
- 14" (for 6" signs) & 24" (for 9" signs)

**Cross**

- Flat or Extruded
- For street name sign cross streets
- Includes (4) set screws for mounting
- 12" lengths

**Adjustable Band Bracket Assembly**

- Uses straps to attach sign to a post
- Includes all pieces to mount one sign to a post
- Adjustable to fit posts from 4" to 12" in diameter

**Sign Link Bracket**

- Rust proof Nylon
- Works with multiple size chain link fence
- Attaches behind sign
- 2 per package

**Chain Link Bracket**

- Rust proof Aluminum
- Use standard nuts and bolts
- Square corners
- 3/8" hole diameter
- 12", 18", or 24" x 1.5"

**Sign Saving Washer**

- Mounting Washer 3" x 3"
- Install washer between sign & channel post
- Prevent warping or buckling of sign
- Made of aluminum

**Wing Bracket**

- Used for mounting signs to wall or pole
- Bracket straps or bolts to pole or wall
- 1 5/8" wide, sticks out 13/16" from wall
- Accepts 0.080 alum & extruded alum
- 12", 18", 24"

Bolts & Nuts

**B-1 Bolt**

- 2.5" x 5/16" Zinc Finished

**One Way Bolt**

- 2.5" x 5/16"
- Vandal Resistant

**One Way Aluminum**

- 2.5" x 5/16"
- Vandal Resistant

**Toggle Bolt & Nut**

- 2.5" x 5/16" Zinc Finished
- For square post & base

**Hex Head Bolt Aluminum**

- Place between bot head and sign
- Protects sign face

**B-1 Nut**

- 5/16" Zinc Finish
- Use with low carbon bolt or screw

**Breakaway Nut**

- 5/16" Aluminum
- Vandal Resistant

**Nut-Aluminum**

- 5/16" Aluminum
- Use with aluminum bolt or screw

**Tuff Nut**

- 5/16"
- Vandal resistant

**Aluminum Drive Rivet**

- Used for attaching signs to square post
- Grip range: .205"-.330"

Traffic Cones

High visibility traffic cones with heavy duty bases. The following cones are kept in stock, however various sizes, colors, body style, and reflective collars are available through special order.



Traffic Cones

- 18" 3 lb. Wide Body Lime
- 18" 3 lb. Wide Body Orange
- 28" 7 lb. Slim Body
- 28" 7 lb. Wide Body
- 28" 10 lb. Slim Body with Reflective Collars - DOT Approved
- 28" 10 lb. Wide Body with Reflective Collars - DOT Approved
- 36" 12 lb. Wide Body with Reflective Collars - DOT Approved



T-Cap Caution Tape Holder for Cones

- Universally fits cones 12-36"
- Secures caution tape
- 100% recyclable



Retractable Cone Bar

- Telescopes from 4' to 7'
- Sits right on top of cone
- Lightweight
- Twist to lock in the desired length



Cone Signs

- Universally fits cones 18" & larger
- 12 3/4" wide x 10 1/2" tall
- Double sided clip on
- Non-reflective orange finish
- Durable, weather resistant ABS plastic



Cone Bracket for Barricade Light

- Allows standard barricade light to be mounted to cones
- Bolt light to bracket and drop over the cone

Available Legends:

SLOW, STOP, MEN WORKING, NO PARKING, RIGHT ARROW, LEFT ARROW, BLANK

Custom legends are available for your individual needs

Delineators



48" Flexible Delineators

- Flexible, durable co-extruded polyethylene
- Meets MUTCD requirements
- 2 piece, self-locking system for ease of installation
- Colors- White, Yellow, Red



Soil Mount for Flexible Delineators

- Closed ended for easier installation
- Effective in a variety of soil types & compositions



Surface Mount for Flexible Delineators

- Pin lock system
- Ideal for permanent situations
- Quick & easy post replacement



Butyl Pads

- Adhesive pads for surface mount delineator posts
- Peel back both sides
- 8" x 8"

Channelizers



Traffic Drum

- PennDOT approved item
- 4 Bands of 6" HIP Sheeting
- Mount for barricade light
- 5 tier design for "anti-roll"



Tire Ring for Traffic Drum

- Inhibits movement on the road
- Textured to increase friction and grab

Channelizers

**Stacker Cone**

- 42" Tall - stackable
- Large handle for better grip and allows caution tape to be strung through
- MASH approved and meets MUTCD standards

**16 Lb. Rubber Base**

- Rubber base used for either the Channelizer or Stacker Cone
- Stacks easily

**Channelizer**

- PennDOT approved item
- 42" Tall - stackable
- 4 Bands of 6" HIP Sheeting
- Mount for barricade light
- Meets MUTCD standards

**20 Lb. Rubber Base**

- PennDOT approved item
- Stacks easily

**Vertical Panel**

- PennDOT approved item
- 8" W x 36" H recessed panel for reflective sheeting
- Designed to withstand repeated impacts with little or no damage to vehicle or unit
- Mount for barricade light

20 lb. base

Barricades



A-Frame Barricade	Width	Length	Height	HIP Sheeting
<ul style="list-style-type: none"> • Includes (2) A-Frame legs with (1) 6' double sided HIP board • Can add second board in necessary • 2 mounts for barricade lights 	Legs 2"	Legs 28"	Legs 44"	<ul style="list-style-type: none"> • Panel 6' x 8"



Type II Barricade	Width	Length	Height	HIP Sheeting
<ul style="list-style-type: none"> • PennDOT approved • Can be filled with sand • Stacking lugs keep units from sliding while stacked • Mount for barricade light 	25"	Unfolded 43" Folded 4"	45"	<ul style="list-style-type: none"> • Top panel 12"x24" • Bottom Panel 8"x24"

Barricades

Type III Barricade with Steel Square



- PennDOT Approved
- Universal mounting holes
- 2 mounts for barricade lights
- Easy to assemble for short term or permanent placement
- 6'L x 8"H x 1"W HIP HIP panels
- Hardware included

Also available for rent - Call for a quote

Specs

Steel Square Tube Upright	63"H x 1.75"W 9 lbs., 14 ga galvanized
Steel Square Tube Feet	60"L x 2"W 6"H riser 10 lbs., 14 ga galvanized
Plastic Panels	High Density Polyethylene
Reflective Sheeting	High Intensity Prismatic Grade

Barricade System	Size
<ul style="list-style-type: none"> • Used for crowd control or manhole guards • Tripod leg system • Stackable • Holes for attaching signage • Mount for barricade lights • Assemble to any length needed • ADA Compliant 	<ul style="list-style-type: none"> • 72"L x 38"H x 3"D • 31 lbs. • Each side has 2 reflective panels (8"H x 50" W) • Each side can hold signs up to 20"W x 14"H



Barricade Light

- LED light source
- High clarity, polycarbonate lens
- 3 modes: flash, steady, off
- Uses D-cell batteries

Roll-Up Fencing



Plastic Safety Fence

- UV resistant, weather proof
- Easy installation and removal with 5' T-posts
- 1 Roll is 4 x 100 Feet
- 7-8 lbs



12" Black Wire Ties

- 100 ties per pack
- 50 lb tensile strength
- Nylon



Green T-Posts 1.25

- Features an angled stud that helps hold the fence against the post
- Finished with enamel for rust resistance

Parking Stops & Speed Bumps



4' or 6' Parking Stops

- Use in parking garages or parking lots
- Reflective stripes
- Won't chip, crack, or crumble
- 4 rebar spikes included per unit
- Rebar spikes can be purchased separately

Available in the following colors:

- Black/Yellow
- Black/White
- Blue/White



Speed Bumps

Black Rubber with Yellow Reflective Stripes
Available in the following sizes:

- 4' x 2.5" x 12" 35 lbs.
- 6' x 2.5" x 12" 52 lbs.
- Can be laid together to create varying lengths
- End caps sold separately



14" Rebar Spikes

4' Parking Stop & Speed Bump = 3 spikes
6' Parking Stop & Speed Bump = 4 spikes
End Cap = 2 spikes

**If customer needs to install product into concrete, they will need to purchase lag bolts*

Safety Flags, Tape, & Stop/Slow Paddles



Vinyl Safety Flag

- 18" x 24" w24" Handle



Vinyl Safety Flag

- 24" x 24" w36" Handle



Vinyl Safety Flag

- 24" x 24" w30" Handle



Vinyl Safety Flag Red with Reflective Tape

- 24" x 24" w36" Handle



Vinyl Safety Flag Red with Stiffener

- 24" x 24" w36" Handle



Stop/Slow Paddle

- 18" or 24" Sign
- HIP Sheeting
- ABS Plastic
- 12" Handle with 60" Staff
- Made in America

Portable Sign Bases



30 Lb. Rubber Base with 60" White Post

- For signs 12"x18" or smaller
- Rubber base won't chip, crack, or crumble
- Great for parking lots for handicap spots, no parking, or pickup areas
- Hardware Included

60 Lb. Rubber Base with 60" White Post

- For signs 24"x24" or smaller
- Rubber base won't chip, crack, or crumble
- Great for parking lots for handicap spots, no parking, or pickup areas
- Hardware Included



Roll-A-Post 24" Black Base with 72" White Post

- Fillable plastic base with wheels for easy transport
- Plastic base won't chip, crack, or crumble like concrete
- Pre-drilled holes in post for multiple sign sizes
- Great for curbside signs, handicap parking spots, pick-up areas, etc
- Hardware Included

Roll-Up Signs & Stands

Roll-Up Sign Features



- All Roll-up signs meet MUTCD requirements
- NCHRP-350 compliant
- Fiberglass ribs, or cross bracing, feature a protective veil to prevent blooming & painful splinters
- Rectangular & delta style corner pockets are made of tough polycarbonate plastic for durability
- Back to back hook & loop strap for storage
- Optional folding flag systems permanently attach 2 warning flags (flag holders for wood dowel flags may be installed on request)
- Overlays for changeable message signs are also available in all sign materials and colors
- Full range of legends, plus custom legends upon request
- Made of high-quality retro reflective SuperBright™ material
- Proudly constructed in the USA

The following signs are kept in stock:

- Be Prepared To Stop
- Fresh Oil
- Mowing Ahead
- One Lane Road Ahead

- Overlay Blank
- Overlay Left
- Picture of a flagger Worker
- Right Lane Closed Ahead

- Road Closed Ahead
- Road Work Ahead
- Steel Plate Ahead
- Work Area Ahead

- Custom signs are also available for purchase



Single Spring Sign Stand

- PennDOT approved item
- Holds 36" and 48" roll-up signs
- 23 lbs. (without sign)
- Orange powder coated steel legs
- Quick-release legs for easy transport and storage



Rubber Base Stands for Roll-Up Signs

- PennDOT approved item
- Holds 36" and 48" roll-up signs
- 44 lbs. (without sign)
- Designed for easy sign relocation
- Post folds flat for easy transport, storage, and stacking



Double Spring Sign Stand

- PennDOT Approved
- Holds 36" and 48" aluminum signs
- Can mount 48" sign up to 152" tall (top of sign)
- Quick-release legs for easy transport and storage
- E-coated for maximum rust and corrosion resistance

- 3 flag holder
- Multiple leg locking positions for uneven ground
- Non-skid rubber feet
- Zinc plated top and bottom universal brackets



Roll-up Sign Bracket

Tripod Stand

- PennDOT approved item
- Designed for 36" & 48" aluminum signs
- 3 flag holder and sandbag hook
- Orange powder coated steel
- Can hold roll-up signs with roll-up sign bracket (sold separately)

Pedestrian Crossing Signs



Economic Pedestrian Cross Walk Sign

- 36" T x 12" W Panel with 43 lb. base
- Impact resistant plastic and recycled rubber base
- Hole for attaching barricade light
- Stacking lugs for both panel and base
- Push panel down into base using foot ledge for tight fit
- Meets MUTCD standards for pedestrian barricades



Pedestrian Cross Walk Sign

- PennDOT approved Item
- 12" W x 47" T
- Double sided HIP sheeting in Fluorescent yell/green
- Anti-twist reactive spring system returns unit upright when struck
- Constructed of flexible plastic that is resistant to damage from UV light, ozone, and hydrocarbons



In-Street Flagger Warning Sign

- PennDOT approved Item
- 12" W x 47" T
- Double sided HIP sheeting in Fluorescent yell/green
- Anti-twist reactive spring system returns unit upright when struck
- Constructed of flexible plastic that is resistant to damage from UV light, ozone, and hydrocarbons



Stop Sign with Post

- PennDOT approved Item
- 60" Post with 24" STOP sign
- Designed to withstand bumper hits and return to original position, without damaging the sign or vehicle
- Constructed of flexible plastic that is resistant to damage from UV light, ozone, and hydrocarbons

Marking & Striping Paint



Striping Paint (Solvent Based) 20 oz.	Yield	Colors
<ul style="list-style-type: none"> Designed to adhere to a variety of surfaces, especially asphalt and concrete Fast drying – 5 minutes to touch VOC compliant and lead-free May only be used in an upside down position 	<ul style="list-style-type: none"> 1 can = about 60 linear feet with a 4" stripe 	<ul style="list-style-type: none"> White Yellow Blue Black




Marking Paint 20 oz.	Longevity	Colors
<ul style="list-style-type: none"> Designed to adhere to pavement, gravel, and soil Meets standards set by OSHA and APWA/ONE Call Systems May only be used in an upside down position Will not wash away once dry 	<ul style="list-style-type: none"> Lasts up to 3 months depending on traffic and exposure 	<ul style="list-style-type: none"> Orange Green Pink Blue Yellow White



Marking Stick
<ul style="list-style-type: none"> Handheld, rolling, inverted marking paint applicator Ergonomically designed trigger & grip - 32" long



Vers-A-Striper
<ul style="list-style-type: none"> Lightweight, yet heavy-duty applicator for striping paint For use on hard surfaces. Stripe widths up to 4" Includes a striping alignment guide



Waterborne Traffic Paint (5 gal)	Colors
<ul style="list-style-type: none"> VOC compliant and lead-free 100% acrylic waterborne traffic paint Conforms to Federal Specification TT-P-1952F Type I & II as well as most state and federal specifications May be applied with conventional or airless sprayers Coverage/Gal (15 mils wet, 4" line) - 320'/gal <10 minute dry time 	<ul style="list-style-type: none"> White Yellow Blue Black



Premium Glass Beads
<ul style="list-style-type: none"> Inter-mix or drop-on applications AASHTO Type 1 M247 Spec Size Range- 20-325 US Mesh 50 lb bags

Pavement Marking Tape



Reflective Safety Warning Tape
<ul style="list-style-type: none"> 2" X 150' DOT Reflective Red & White



Temporary Pavement Marking Tape
<ul style="list-style-type: none"> 4" X 100 YD rolls- yellow or white PennDOT Approved Conformable, highly reflective, weather resistant More durable than temporary paint Superior adhesive

Stencils - Standard & Custom



Stencils

- All offered in Duro 1/16" and Maxi 1/8" LLDPE plastic
- Tough flexible, lays flat and lasts for hundreds of uses
- Material designed to shed paint and is easy to clean
- Perfect for contractor, professionals, and anyone who wants the best

The following stencils are kept in stock:

- Handicap 21 1/2"
- 24" X 16" STOP
- NO PARKING 10"
- Straight Arrow 36"
- Handicap 39"
- Number Kits- 10" or 12"
- Alphabet Kit 12"
- Wording Stencils 12"
- Arrow Kit 42"
- Many legends and symbols available to order

Pavement Marking Tools

**G3X100 Giant Chalk Line Reel**

- 3X rewind retrivall
- Ergonomic grip designed to reduce wrist strain
- Chalk catcher reduces waste and keeps chalk off your clothes
- 12 oz capacity.

**G110D Little Giant Double Chalk Reel**

- Holds over 1 pound of chalk for fewer refills
- 110 ft giant string, 1x1 rewind
- One piece steel crank for long life

**Prochalk Standard Marking Chalk**

- 5lb White
- 5lb Blue
- 8 oz. White
- 8 oz. Blue

**Half-Moon Marking Chalk**

- Designed for hand marking
- Ideal for layout work and marking

**Surveyor Stake Flags**

- 2-1/2" x 3-1/2" flag on a 21" stake
- Sold individually or in bundles of 100

**G100 Little Giant Chalk Reel**

- Holds over 1 pound of chalk
- 100' giant string and pull ring
- One-piece steel crank for long life

**G130 Chalk Line Reel**

- Holds over 1 pound of chalk
- 130 or 150 foot giant string and pull ring
- One-piece steel crank for long life

**Hard Lumber Crayons**

- Weather and wear resistant
- Pink, orange, white, and yellow (stock)

**Ultra Flagging Tape**

- Available in florescent Pink, Orange, & Lime
- 1 3/16" x 150'
- For purchase by roll or case (12 rolls)

**Caution Tape**

- 3" x 1,000'
- 2 mil

Pavement Measuring Tapes



Open Wheel Fiberglass Tape

- Units- ft, in, 1/8 in
- 300 ft long
- Hook End



Open Wheel Fiberglass Tape

- Units- ft, in, 1/8 in
- 100 ft long
- Hook End



Ultra Bright Blade Tape Measure

Measure

- Easier to read in low light
- Vertical scale on the reverse
- 25 or 30 ft. long

Pavement Measuring Wheels



Metal Measuring Wheels

- 3' or 4' sturdy metal construction, measures in ft/in
- Collapses to 1/2 size
- Bold, 3/4" numbers, 5 digit counter
- Best seller



CONTRACTOR MEASURING WHEELS

- Heavy-duty, polycast wheel w/ clean three-spoke design
- New handle telescopes down to a more compact 23 inches for ease of transport and more compact storage



CONTRACTOR MEASURING WHEELS

- Heavy-duty, polycast wheel
- Re-set on the handle AND on the unit housing
- Brake on pistol grip — stops counting instantly



SINGLE WHEEL (RR112)

- Weighs less than 2 pounds
- Handle telescopes from 17 inches (fits into a toolbox or briefcase) up to 38 inches
- Easy to read, magnified counter



DUAL MEASURING WHEEL

(RR182)

- Patented raised reset button that enables you to re-set the counter with your foot
- Handle telescopes from 20 inches up to 42 inches

Thermoplastic



Pre Formed Thermoplastic


- Complies with MUTCD; used primarily for regulatory markings on public streets, highways and private properties
- Heavy-duty, durable, intersection grade pavement marking material
- Supplied at 125 mil for cost-effective service life
- Lasts 6 to 8 times longer than paint
- No minimum ambient or road temperature requirements; pavement marking season can be extended into colder months
- Retroreflective; glass beads mixed throughout material so that as the marking wears new beads are exposed
- Precut; ready to use out of the carton
- Simple 3-step application process



Life Cycle Performance and Savings with PreMark® Bike Lane Markings		
Preformed Thermoplastic <small>Block Contrast Markings</small>	Waterborne Paint	Cold Plastic Tape
<small>EACH PHOTOGRAPH TAKEN AFTER ONE YEAR OF SERVICE</small>		

Regulatory Markings

Standard FHWA Designs - Bike lane symbols are standard in 90 mil. Thickness of 125 mil. is available

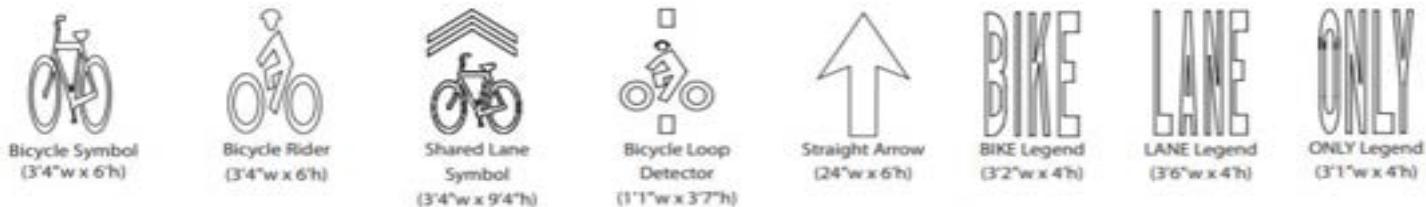

Linear Thermoplastic	Length	Widths	Thickness
<ul style="list-style-type: none"> • Enhanced visibility both day and night • Uniformly distributed glass beads throughout • Designed for use in heavy traffic • Requires no minimum air or road temperature 	• 3'	• 4" up to 24"	• 125 mm



Manhole Protection Rings	Inner Diameter	Outer Diameter	Thickness
<ul style="list-style-type: none"> • Subtle incline that provides smooth, damage-free ride • Kit consists of 3 rings with the same inside diameter but a different outside diameter so a height difference from 1/8" to 3/8" can be adjusted by using one, two, or three rings • Requires no minimum air or road temperature 	• 10"	<ul style="list-style-type: none"> • 14" • 18" • 22" • 34" • 38" • 42" 	• 125 mm (non-beaded)



Handicap Accessibility	Length	Widths	Thickness
<ul style="list-style-type: none"> • Last 6 to 8 times longer than painted surfaces • ADA compliant and offer high skid resistance for pedestrian safety • Uniformly distributed glass beads throughout 	• 40"	• 40"	• 125 mm (non-beaded)



Hard Hats & Acessories



Hard Hats

- Meets ANSI Z89.1 Type 1, Class C, G & E standards
- Lightweight High Density Polyethylene material
- Low riding nape strap for impact absorption



LED Hard Hat Band

- Visible up to 1/4 mile away
- Can be worn in any weather
- Provides up to 10 hours of visible light
- USB charging cord included



Halo SL


- 50 ft spotlight
- 360 visibility for 1/4 mile
- Compatible with any standard hardhat
- Water resistant



Body Alert Flashing Lights & Flashlight

- Water resistant
- Visible up to 500 meters
- Built in flashlight
- USB charging - 2 hour recharge time

Vests & Pants



General Purpose - Class 1

- Used in low impact areas
- Used where speeds are <25 MPH
- Parking attendants, warehouse, deliver drivers



Class 2 Vest

- Reflective, daylight use only
- For use with speeds 25-50 MPH
- Airport, high-volume parking, toll booth



Class 2 - 5 Point Tear-Away

- Size adjustable, five-point tear-away design, multiple pockets, and a message provision on back
- One size fits most



Class 2 with LED

- Expandable breakaway vest
- 24 LED's visible up to 1/4 mile away
- 10 hours illumination from USB rechargeable lithium ion battery



Class 3 Vest

- Reflective, High Traffic areas
- Nighttime use, speeds >50 MPH
- Flagging, construction, emergency crews



Shin Reflectors

- Made of ANSI compliant materials
- Lightweight lime polyester mesh.
- 2" reflective stripes, 360° pattern
- Easy on/off hook and loop straps
- Adjustable - one size fits all



Pants - Class E

- Drawstring waist with elastic
- Pass through side pockets
- 4" triple trim reflective stripes
- Add to Class 2 vest to be classified as a Class 3 ensemble

Safety Glasses



Black/Blue Frame - Fog Free Clear Lense

Black/Blue Frame - Fog Free Gray Lense

Black Frame - Fog Free Clear Lense

Black Frame - Fog Free Gray Lense

Clear Frame - Fog Free Clear Lense

Gloves



**Cotton Canvas Gloves-
Men's 8 oz. Knit Wrist
Cuff**

- The natural fibers of these cotton work gloves keep your hands cool and comfortable
- Made with 100% Cotton.

Leather Palm Gloves-Safety Cuff

- Sewn from heavy shoulder leather
- Generously sized with a padded palm for a comfortable fit

Leather Palm Gloves-Knit Wrist

- Sewn from heavy shoulder leather
- Generously sized with a padded palm for a comfortable fit
- Knit wrist

**Pigskin Drivers Gloves-
Elastic Back**

- Pigskin won't dry or crack after getting wet and drying
- Soft feel and durable
- An economical alternative to top grain cowhide

Leather Gloves, Elastic Back

- Unlined leather work gloves are made entirely from top-grain leather and are deep oil tanned for softness
- Sewn with an inset, keystone thumb and bound at the cuff with leather



Knit Gloves with Latex Coated Palm

- The rubber coating on the palms and fingers give you great grip while the 7-gauge cotton/poly shell provides you with a comfortable fit

Nitrile Coated Gloves- Smooth Finish, Safety Cuff

- Blue Steel™ gloves offer a heavy duty nitrile coating that stands up to handling abrasive materials like those used in construction and metal fabrication

Insulated PVC Coated Gloves-Safety Cuff

- Protect in three ways: from cold, rough surfaces and moisture
- Foam insulation with a cotton jersey lining add warmth and comfort
- Added a rough finish to make your grip more secure

Latex Gloves

- Powder Free
- Ambidextrous
- Textured
- Single use
- Non-Sterile

Geotextile - Nonwoven

Nonwoven geotextiles are made from high-quality polypropylene staple fibers that are needle-punched to form a dimensionally stable fiber network. They also include fabrics that support separation and stabilization, subsurface drainage, filtration, and cushioning. This family of nonwoven products is compliant with AASHTO/NTPEP standards and is available in a variety of styles to fit your specific project needs and specifications.



Weight/Class	Dimensions	Coverage
3.5 or 4 oz.	3' x 360'	120 SY
3.5 or 4 oz.	6' x 360'	240 SY
4 oz.	7.5 x 360'	300 SY
3.5 or 4 oz.	12.5' x 360	500 SY
4.5 oz.	12.5' x 360	500 SY
6 oz.	12.5' x 360	500 SY
12 oz Class 4 Type A	15' x 300	500 SY

Features & Benefits

- Requires less aggregate during construction reducing road thickness
- Separates aggregate from soil, doubling the useful road life
- Provide superior hydraulics and soil retention to support filtration

Geotextile - Woven

Woven geotextiles are individual threads (monofilaments, multi-filaments, fibrillated yarns) or slit films and tapes that are actually woven on a loom. Typically, woven geotextile fabrics can be used for stabilization, separation, reinforcement, and erosion control applications. Woven geotextile fabrics strive to provide dimensional stability and deliver superior load distribution. In comparison to non-woven geotextiles, woven geotextiles typically maintain slower drainage characteristics due to their smaller pore sizes. Therefore, woven geotextiles are less likely to be applied in engineered areas that require high filtration and drainage characteristics.



Weight/Class	Dimensions	Coverage
200 lb. Class 3 Type A	12.5' x 432'	600 SY
315 lb.	12.5' x 360'	500 SY
111F Class 1 & Class 5 Type A	12.5' x 300'	417 SY
4X4 HF Class 4 Type C	15' x 300'	500 SY

Features & Benefits

- High tensile strength and low elongation provides dimensional stability
- Requires less aggregate, reducing the overall thickness of the road & Increases performance life of the road
- Resistant to ultraviolet degradation
- Resistant to biological clogging
- AASHTO/NTPEP certified

Geotextile - Paving Fabric

Paving fabrics are used as a moisture barrier and stress absorbing interlayer beneath flexible pavements such as asphalt overlays or a chip seal. It is AASHTO/NTPEP compliant and is available in a variety of styles to fit your specific project needs and specifications.



Weight/Class	Dimensions	Coverage
Non-DOT Approved	12.5' x 360'	500 SY
DOT Approved	12.5' x 360'	500 SY

Features & Benefits

- Engineered with optimal elongation to allow placement directly onto a milled surface
- Flexible design allows smooth, wrinkle-free installation even around curves
- Poses no safety hazard or irritation associated with fiberglass-based product filtration

Sediment Control



Silt Socks	Size	Longevity	Material
• Heavy Duty Multi-Filament Polypropylene(HDMFPP)	8" x 200'		
• 1/8" openings - 250 psi strength	12" x 110'		
• Meets all federal, state, and local specifications	18" x 55'		
• Wrapped pallet	24" x 40'		
• Includes stakes		> 2 Years	Composted Hardwood Materials



Straw Wattles	Size	Longevity	Material
• For use as check dams in channels and ditches, drain inlet protection and perimeter sediment control			
• Tubular polypropylene netting	12" x 10'		
• Wrapped pallet		≤ 18 Months	
• Includes stakes			Compacted Agricultural Straw



Silt Fences	Size	Longevity	Material
• Designed to filter most suspended solids & help capture eroded soil flows			
• Pre assembled with 2" wood stakes, 8' on center	24" x 100'		
• Can be manufactured with a polypropylene or wire mesh backing for additional burst resistance	36" x 100'	≥ 6 Months	Woven Geotextile



Super Silt Fences	Size	Materials
• Designed to handle more extreme erosion conditions	50" x 50'	(1) Chainlink Roll 11.5 ga. 42" x 50' (5) Post 2.5" x 6' 16 ga. (15) Alum. Ties 8.5" 9 ga. (52) Hog Rings Alum. 11 ga. (1) Roll 50" x 50' woven geotextile



Dewatering Bag (Filter Bag)	Available in:
• Remove silt, sand, and other debris from pumped water on construction sites, ponds, dredging locations and more	• 4' x 6' • 5' x 6' • 10' x 15' • 15' x 15' • 15' x 30'



Inlet Filter Bags (with or without metal frames)
• 6.3 Cubic Feet Capacity • Metal Frame is specially designed to hold a basket under grate • Made of a high-flow material allowing water to flow directly through grate and basket, leaving all sediment and debris behind • Filaments are woven to form a stable and durable network • Non-biodegradable and resistant to move soil chemicals, acids, and alkali with a pH range of 3 to 12.

Erosion Control Blankets

ECBs are designed to provide temporary protection for grass seed and topsoil during the germination and progressive revegetation and root system development stages. Netting is stitched to the topside or both sides of the ECB. A variety of nettings is available depending on your project requirements.



Product	Sizes	Slope	Longevity	Matrix
Single Sided Straw	<ul style="list-style-type: none"> • 8' x 112.5' 100 SY • 16' x 112.5' 200 SY 	≤ 3H:1V	≤ 12 Months	Agricultural Straw
Double Sided Straw	<ul style="list-style-type: none"> • 4' x 112.5' 50 SY • 8' x 112.5" 100 SY • 16' x 112.5" 200 SY 	≤ 2H:1V	≤ 12 Months	



Product	Sizes	Slope	Longevity	Matrix
Straw/Coconut	<ul style="list-style-type: none"> • 8' x 112.5' 100 SY (Double Sided) 	≤ 1.5H:1V	≤ 24 Months	70% Straw 30% Coconut



Product	Sizes	Slope	Longevity	Matrix
Coconut	<ul style="list-style-type: none"> • 8' x 112.5' 100 SY (Double Sided) 	≤ 1H:1V	≤ 36 Months	Coconut



Product	Sizes	Slope	Longevity	Matrix
Single Sided Curlex	<ul style="list-style-type: none"> • 8' x 90' 80 SY • 8' x 150' 133 SY 	≤ 2H:1V	≤ 18 Months	Great Lakes Aspen
Double Sided Curlex	<ul style="list-style-type: none"> • 4' x 180' 80 SY • 8' x 90' 80 SY • 8' x 150" 133 SY 	≤ 1.5H:1V	≤ 24 Months	



Product	Sizes	Slope	Longevity	Matrix
Tri-Net Straw/Coco	<ul style="list-style-type: none"> • 8' x 112.5' 100 SY 	≤ 1.5H:1V	Permanent	70% Straw 30% Coconut
TRM - 10 oz.	<ul style="list-style-type: none"> • 8' x 112.5' 100 SY 	≤ 1H:1V		Crimped Recycled Polyester
TRM - 12 oz.	<ul style="list-style-type: none"> • 8' x 112.5' 100 SY 	≤ 1H:1V		



Product	Sizes	Description
Landscaping Fabric	<ul style="list-style-type: none"> • 3' x 300' 100 SY 3.5 oz. • 6' x 300' 200 SY 3.5 oz. 	<ul style="list-style-type: none"> • Retards weed growth with a barrier between mulch and soil • Allows water, air, herbicides, fertilizer and insecticide to flow into the soil • Reduces plant bed maintenance, maintains moisture and cuts the need for watering.

* Biodegradable netting for Straw, Straw/Coconut, Coconut, and Curlex Erosion Control Rolls are available for special order upon request. Please call or email for a quote

Staples and Applicators



Square Staples

- 1,000/Box
- 11 ga 1"x6"x1"



Staple Stick

- 3' handle
- Magnetic base
- Designed to be used with square or round staples



Round Staples

- 1,000/Box
- 11 ga 1"x6"x1"



Staple Ease Driver (6" or 8" staples)

- Square driver or round driver
- Reduces labor fatigue
- Light weight design
- Stainless steel driving rod and slide hammer action will install the staples into any ground condition including frozen ground

Grass Seed & Fertilizer



Pro Landscape Mix (50 or 25 lb. Bag)

- General purpose mixture combining quick establishment, dark green color and fine texture
- Does well in most soil & requires minimal maintenance
- Used for new lawn establishment and overseeding of established lawns

Seeding Rate

6-7 lb. per
1,000 sq. ft.

Overseeding

4-5 lb. per
1,000 sq. ft.

Mix

65% Perennial Ryegrass
25% Creeping Red Fescue
10% Kentucky Bluegrass



Premium Lawn Mixture (50 or 25 lb. Bag)

- Elite turf-type fescues
- Tolerant to heat, drought, and wear
- Requires less fertility and water than bluegrass or ryegrass mixtures

Seeding Rate

7-8 lb. per
1,000 sq. ft.

Overseeding

N/A.

Mix

80% 2x Proprietary Tall Fescue
15% Proprietary Perennial Ryegrass
5% Proprietary KY Blue



Dura Turf (50 or 25 lb. Bag)

- Cost effective mixture featuring quick establishment and durability
- Does well in most soil & requires minimal maintenance
- Annual ryegrass will disappear after the first year & perennial grasses will remain

Seeding Rate

8 lb. per
1,000 sq. ft.

Overseeding

N/A.

Mix

45% Annual Ryegrass
25% Perennial Ryegrass
25% Creeping Red Fescue
5% Kentucky Bluegrass



Contractors Mix (50 lb. Bag)

- Utilized for areas that require quick, temporary, inexpensive cover
- Not a permanent seeding mix

Seeding Rate

5-6 lb. per
1,000 sq. ft.

Overseeding

N/A.

Mix

90% Annual Ryegrass
10% Perennial Ryegrass

Lime & Fertilizer



Lime (50 or 40 lb. Bag)	Coverage	Mix
<ul style="list-style-type: none"> • Spherical shaped pellet that is easy & accurate to apply • Neutralizes acidic soil • Enhances fertilizer availability • Ideal for lawns, vegetable gardens & flower beds 	50 lbs. cover 10,000 sq. ft.	21% Calcium 10% Magnesium



Starter Fertilizer (50 lb. Bag)	Coverage	Mix
<ul style="list-style-type: none"> • Starter fertilizer that provides nutrition for new lawn establishment • Gives seedlings boost root growth and establish strong root structure • Can be used as fall fertilizer on established lawns to promote good lawn health into winter 	50 lbs. cover 14,000 sq. ft.	16% Nitrogen 28% Phosphorus 10% Potassium



General Fertilizer (50 lb. Bag)	Coverage	Mix
<ul style="list-style-type: none"> • Use it on almost all plants in your garden, including vegetables, fruit trees, lawn and flowering plants • For best results, apply in the Spring and Fall • Stimulates healthy leaf growth and promotes a thick, lush lawn 	50 lbs. cover 5,000 sq. ft.	10% Nitrogen 10% Phosphorus 10% Potassium

*Other seed and fertilizer available upon special request

Hydromulch



Paper Mulch	Application	Packing
<ul style="list-style-type: none"> • Cellulose hydroseeding mulch • Provides a good environment for seed germination • 100% recycled organic and biodegradable • Ideal for quality turfgrass plantings such as home lawns and golf courses 	<ul style="list-style-type: none"> • 1,800 lbs/acre on Flat to 5H:1V slopes <p>Tank Loading</p> <ul style="list-style-type: none"> • 50 lbs/100 gallons of water 	<ul style="list-style-type: none"> • 50 lb bales



Paper Mulch with Tackifier	Application	Packing
<ul style="list-style-type: none"> • 100% hand sorted recycled newsprint with Pro-Tac • Can be used in jet agitated and mechanical agitated hydroseeding machines • Low moisture - cleaner mulch less chance of mold and mildew forming in the bag 	<ul style="list-style-type: none"> • 1,800 lbs/acre on Flat to 5H:1V slopes <p>Tank Loading</p> <ul style="list-style-type: none"> • 33 lbs/100 gallons of water 	<ul style="list-style-type: none"> • 33 lb bales



Tackifier	Application	Packing
<ul style="list-style-type: none"> • Professional grade hydroseeding tackifier • Soil stabilizer • Reduces water & wind erosion • Dissolves quickly and mixes completely into the hydroseeding slurry • Lubricates the slurry for ease of pumping 	<p>Hydroseeding/Mulching</p> <ul style="list-style-type: none"> • 3-6 lbs/1500 gal water/acre <p>Dry Applications</p> <ul style="list-style-type: none"> • 10-20 lbs/acre on flat to 4:1 slopes • 20-50 lbs/acre on 3:1 to 1:1 slopes 	<ul style="list-style-type: none"> • 5 lb bags • 55 lb paper bags • 3 lb jugs

Other Landscaping Items



Strawmax	Application	Packing
<ul style="list-style-type: none"> Contains natural tackifier Speeds up seed germination Product is 100% biodegradable and natural Retains soil moisture Promotes grass growth through soil stability 	<ul style="list-style-type: none"> Covers up to 500 sq. ft. 	<ul style="list-style-type: none"> 2.5 cu. ft.

Straw Bales

- Ideal for erosion control
- Use for effective seed germination and coverage
- Great for animal bedding
- Standard Size



Wood Grade Stakes

- 2" x 2" x 24"
- 1.5" x 1.5" x 36"

Empty Sandbags

- 14" x 26" with tie string
- UV treated
- Can hold up to 50 lbs



EZ Load Staple Bag

- Holds 75 11Ga staples
- Keeps staples upright
- Multi use - great for a variety of accessories and tools for landscaping, gardening, drip or outdoor lighting installations

Ice Melt



10% Magnesium

- Melts to -10° F
- Free flowing
- Pet & plant safe
- Great for commercial & residential use
- Safe for concrete & pavers
- Purchase by individual bag or by skid



Halite

- Melts to 5° F
- Most economical option
- Free flowing
- Non-tracking
- Pet & plant safe
- Purchase by individual bag or by skid



3% Magnesium

- Melts to 0° F



20% Magnesium

- Melts to -12° F



12% Calcium

- Melts to -20° F

Also available for Special Order

Special Orders Must Purchase Full Skid (56 bags on a skid)
Call for current pricing



Snow Stakes

- Long lasting fiberglass construction
- Commercial Grade with cap
- UV Resistant Coating

Single Wall HDPE

- Recycled or DOT Grade
- Couplers sold separately
- Available fittings include Tees, Wyes, Reducers, and Elbows
- Perforated Pipe is available

Size	Coil Size	Non-Perforated	Perforated	Couplers
4"	100'	X	X	X
6"	100'	X	X	X

**Double Wall SLHDPE**

- Heavy duty corrugated pipe, with smooth interior
- Both AASHTO Grade Resins (PennDOT) & Recycled Grade Resins are available
- Comes in 20' & 10' sections
- Each 20' section includes one bell end
- Available fittings include Tees, Wyes, and Reducers

Size	Non-Perforated	Perforated	Couplers	End Cap	Flared End Sections	Elbows
6"	X	X	X	X		22.5°, 45°, 90°, Tee's
8"	X	X	X	X		22.5°, 45°, 90°, Tee's
10"	X	X	X	X		22.5°, 45°, 90°, Tee's
12"	X	X	X	X	X	22.5°, 45°, 90°, Tee's
15"	X		X	X	X	22.5°, 45°, 90°, Tee's
18"	X		X	X	X	22.5°, 45°, 90°, Tee's
24"	X		X		X	22.5°, 45°, 90°, Tee's
30"	X		X			
36"	X		X			
42"	X		SO			
48"	X		SO			
60"	X		SO			

- Items marked with an "X" are typically stocked in our York office
- For Plastic to Metal or Metal to Plastic connection, Mar Mac Couplers are available in various sizes - stock may vary
- All other items are available to order

**Wire Mesh Gabions/Mattress**

- These flexible, permeable, rock-filled and interconnected modular units
- Create a monolithic wall for earth retention or a blanket for soil stabilization
- Welded wire mesh - each point of contact in the grid is actually welded to form a more rigid connection for better installation times and reduced labor costs.

**Benefits of gabions:**

- Flexibility, strength and permeability
- No cure times, rebar schedules, etc.
- Low cost installation
- Rarely requires separate footings or foundations
- Locally available fill materials
- Bioengineering potentials
- Minimal equipment needs
- Easily shipped and unloaded
- No maintenance demands
- Field customizable

Corrugated Metal Pipe (CMP)

What is CMP?

- CMP is typically used in applications such as culverts, storm water systems, drainage systems, and small bridges
- A two-ounce per square foot zinc coating is applied to the steel, adding a thickness of 0.0017" on each side

What are the Benefits of CMP Pipe?

- Economics - Due to the lower installation costs and durability, CMP is the most economical pipe solution for both internal and life duration costs
- Life Cycle - Users can expect a service life of at least 50+ years in most typical drainage applications
- Superior Strength and Durability
- Environmentally-friendly and LEED-friendly, with as much as 83% recycled content

What are my Options?

- 10' or 20' sections
- Bands, End Sections, and Elbows available
- Pipe arches available

Corrugated Metal Pipe

Size	Guage	10' or 20' Sections	Bands	Flared End Sections	Elbows
6"	16	X			
8"	16	X	X		
10"	16	X	X		
12"	16	X	X	X	
15"	16	X	X	X	
18"	16	X	X	X	
21"	16	SO	SO		
24"	16	X	X	X	
30"	16	X	X		
36"	16	X	X		
42"	16	X			
48"	16	X			
54"	14				
60"	14 or 16				
72"	14 or 16				

Corrugated Metal Pipe (Arch)

- Arches are typically used where headroom is at a minimum

Size (with equivalent pipe diameter)	Guage	10' or 20' Sections	Bands	Flared End Sections	Elbows
14 x 9 = 12" Round	16	X			
17 x 13 = 15" Round	16	X	X		
21 x 15 = 18" Round	16	X	X		
24 x 18 = 21" Round	16				
28 x 20 = 24" Round	16	X	X		
35 x 24 = 30" Round	16	X	X		
42 x 29 = 36" Round	16				
49 x 33 = 42" Round	14				
57 x 38 = 48" Round	12				
71 x 47 = 60" Round	10				

- Items marked with an "X" are typically stocked in our York office
- For Plastic to Metal or Metal to Plastic connection, Mar Mac Couplers are available in various sizes - stock may vary
- All other items are available to order

Pavement Sealers and Additives

SealMaster

Federal Spec Coal Tar - Coal tar sealer meets Federal Specification RP-355e and is designed to protect and beautify asphalt pavement surfaces including parking lots, airports, driveways, shopping malls, roadways, and more. Coal tar provides a deep, rich black color that is resistant to oil, fuel, weather elements, and traffic wear. Coal Tar is the most fuel-resistant sealer on the market. One gallon will cover approximately 70-80 square feet per coat when properly mixed and applied.



Asphalt Emulsion - A mineral filled asphalt emulsion sealcoat that is designed to protect and beautify all asphalt pavement by replenishing the binder that is lost through weathering and aging. Asphalt emulsion has no irritating fumes, making it very user friendly. One gallon will cover approximately 100-120 square feet per coat when properly mixed and applied. Coverage depends on pavement age, porosity and method of application.

Equinox LN-11 - A superior gilsonite driveway sealer that dries to a beautiful black glossy finish. Used as a rejuvenator and sealer on bituminous asphalt parking lots and driveways, the material may be applied by brush, squeegee, or spray equipment at a rate of 60-80 square feet per gallon. Available in bulk or 5-gal buckets.

Sealer Additives



FASS-DRI

- Reduces curing time of both Coal Tar and Asphalt Based Sealers
- Improves toughness, adhesion, flexibility, color, and sand suspension.
- Locks in sand and makes coating dry blacker.
- 2 Gallon Buckets



TOP TUFF

- Provides a blacker sealer finish.
- Improves surface toughness, helps suspend sand, enhances resistance to oils, fuels, and grease.
- Reduces power steering marks.
- 5 Gallon Buckets



Pave Gel

- Improves sealer flexibility
- Enhances resistance to oils, fuels, and grease
- Provides a blacker dried sealer film
- Provides sand suspension and uniform application of sand slurry mixes



FSA

- Cuts drying time in half
- Improves bonding
- Stops tracking
- Makes coating dry blacker
- Proven performance

Sealer Primer



Prep Seal

- A ready to use polymer based emulsion designed to seal oil, grease, and gasoline spots or stains prior to the application of pavement sealers over asphalt surfaces.
- Approximately 150-200 square feet per gallon depending on surface porosity.
- 1 Gallon Jugs

Aggregates

Black Blast Slag

Angular aggregate used when more traction is desirable or where the surface is especially worn. Size: 40/70 mesh. Available in 50 lb. bags or by skid.

Crack Sealants - Hot Applied



ASTM D6690 Type II (Oil Jacket)

- PennDOT approved, in 35 lb boxes
- For use in oil-jacketed kettles.
- Meets ASTM D6690 Type I&II.
- Available by single box or by the skid
- For use on highways and roadways



ASTM D6690 Type I (Oil Jacket)

- PennDOT approved, in 35 lb boxes
- For use in oil-jacketed kettles.
- Available by single box or by the skid
- For use on roadways and parkinglots



Direct Fire Crack Filler

- Formulated with select asphalt resins, synthetic polymeric rubber and plasticizers.
- Designed specifically for asphalt and concrete pavements.
- May be used in either oil-jacketed or directfire melters.
- 30 lb boxes.

Crack Sealants - Cold Pour



POURABLE CRACK SEALANT

- Rubberized cold-applied asphalt emulsion
- For filling cracks up to 1/2" wide in pavement surfaces.
- 5 Gallon Buckets



Kold-Flo

- A modified asphalt emulsion crack filler & sealer that is ideal for repairing cracks
- Can be used right from the bottle
- 1 Gallon Jugs



TROWEL GRADE CRACK FILLER

- Heavy duty material for filling cracks in excess of 1/2" wide on asphalt surfaces.
- 5 Gallon Buckets

Cleaning Agents



Hand-y Pro Towels

- 75 pre-moistened professional strength cleaning towels
- 1 smooth side & 1 rough side
- Citrus scent



Big Orange-E (15 oz)

- Heavy duty citrus degreaser
- 100% natural citrus solvents
- Spray on surface to remove grease, oil, asphalt
- Water rinsable



Bug and Tar Remover

- Dissolves bug deposits, tar, and tree sap from vehicles
- Citrus based formula - no kerosene
- Safe on clear coat finishes
- 16 oz.



Tar & Asphalt Remover

- Water soluble cleaner that effectively dissolves and removes tar, blacktop & asphalt products, and other petroleum based products.
- Citrus Based
- 32 oz. Bottles

Asphalt Repair



Aquaphalt (4.0 & 6.0)

- Pre-mixed repair material that is 100% environmentally friendly.
- Reacts and hardens with only water
- 4.0 (fine) is used for $\frac{1}{2}$ " – 1" repairs.
- 6.0 (medium) is used for repairs 1"-1.25".
- 50 lb. Buckets



Quik Joint Crack Repair Tape

- Roll-out cold applied sealant that creates a durable, watertight and elastic seal after being heat-bonded to the pavement surface.
- Specially-blended, high-tack rubberized asphalt compound
- 2" x 50' rolls (400' per bucket)
- 4" x 50' rolls (200' per bucket)



EM-50 Tack Coat

- Can be used as a primer whenever an asphaltic product is going to be applied
- Used for damp proofing & as a tack coat for application of bituminous surfaces before resurfacing
- 5 Gallon Buckets



UPM Cold Mix

- Workable in all weather conditions, from snow and ice to rain and extreme heat
- Does not require primer or tacking materials
- 50 lb. Bags



GATORPAVE™

- Ready to use patching material for cracked & alligatorated pavement areas.
- Applied with squeegee or trowel with no heat required
- Environmentally friendly emulsion based formula.
- 5 Gallon Buckets



RC Tack Coat

- An asphalt cutback formulated to be a premium coating for penetration, priming, and binding bituminous surfaces
- 5 Gallon Buckets



Material Available in Bulk:

NTT- Non Tracking Tack (Anionic)

- PennDOT approved

AC20/PG64-22

- Asphalt Cement
- 25 gal minimum
- No 5 gal buckets

GeoComposites/Overlay Fabric



Petrotac

- PennDOT Approved
- Self-adhesive paving membrane
- Protects pavement from moisture
- Provides stress absorbing interlayer
- Reduces structural deterioration
- Increases overlay life
- Can be used as a moisture barrier on bridge decks
- Available by the roll or by the skid

Available Sizes:

- 12" x 108'
- 18" x 108'
- 24" x 108'
- 36" x 45'
- 48' x 50'

Crackfilling Equipment



Used for AC-20 or direct fire applications



MA10 Wheeled Melter/Applicator

- Fast and efficient method for the application of hot applied crack sealants
- Can be used without heat for cold pour materials
- Comes with a 50,000 BTU burner, 10' hose, regulator, striker, and draw-off valve
- Capable of melting and applying 600 lbs of sealant per day. 10 Gallon capacity.



10 Gallon Mini Melter

- Can provide hot material in 20 minutes or less
- Stationary version of our popular MA10 wheeled unit
- Comes with a 50,000 BTU burner, 10' hose, regulator, striker, and draw-off valve
- Kettle is capable of melting up to 600 lbs. of sealant per day.



30 Gallon Flex Kettle

- Can provide hot material in 30 minutes or less
- Includes temperature gauge with guard, built in hand agitator, lifting handles, hinged lid a 50,000 BTU burner, 10' hose, regulator, striker, and draw-off valve
- Capable of melting up to 1200 lbs. of sealant per day.



55 Gallon Flex Kettle

- Can provide hot material in 30 minutes or less
- Includes temperature gauge with guard, built in hand agitator, lifting handles, hinged lid, 50,000 BTU burner, 10' hose, regulator, striker, and draw-off valve
- Capable of melting up to 1800 lbs. of sealant per day.



MA-10 Burner Assembly

- Torch/Burner with V-77 Needle Valve w/Orifice
- Regulator w/Pressure Gauge
- 6' Hose
- Striker
- Can be purchased as a kit or individually



1-1/2" Molasses Valve

- Machined and lapped brass faceplate for smooth operation and perfect seal
- Durable cast iron body
- Painted black enamel finish
- Pad-lockable



Asphalt Pour Pot (2.6 Gal.)

- Used to apply hot and cold crack sealants
- Durable 14-gauge welded steel
- Fingertip nozzle control
- Adjustable 3 size pouring nozzle



Torch Pak FV-11-K

- 750,000 BTU/H

Crackfilling Squeegees



Pull V-Shaped Squeegee

- Forces sealant into cracks while "pulling" excess material
- Black neoprene blade with temp rating of 220° F
- 54" Wood handle



Push V-Shaped Squeegee

- Forces sealant into cracks while "pushing" excess material
- Black neoprene blade with temperature rating of 220° F
- 54" Wood handle



Adjustable V-Shaped Squeegee

- Reversible V-Squeegee can be adjusted 360° to be "push" or "pull" style
- 48" Wood handle



Push/Pull V-Shaped Squeegee

- Push or Pull
- Black neoprene blade with temperature rating of 220° F
- 54" Wood handle

Crackfilling Squeegees



U-Shaped Squeegee

- Works well with Pour Pots
- Leaves wider path of sealant
- "Push" style
- 54" Wood handle



V-Shaped Squeegee Head

- Push or Pull
- Durable, heavy duty frame
- Black neoprene blade



Black V-Shaped Replacement Neoprene Blade

- Replacement blade for 704942 squeegee
- Temperature rating of 220° F



Red Silicone V-Shaped Replacement Blade

- Temperature rating of 392° F



Tan Gum V-Shaped Replacement Blade

- Temperature rating of 180° F



Black Neoprene U-Shaped Replacement Blade

- Replacement blade for squeegee
- Temperature rating of 220° F

Sealcoating Equipment



40" & 52" Brush Box

- 40" or 52" Long X 11" deep X 16" tall 16 ga. metal box with hinged lid.
- 3/4 X 9 ga. expanded metal to hold brush 2" from bottom.
- Adjustable holder for handles. 1" NPT drain with mounting angles to secure box
- Weight 59 lbs. (4") 73 lbs. (52")



Steel Sealcoating Spray Tips

- High quality hardened steel
- 1/4" thread size
- Available in the following sizes: 80/20, 80/30, 80/40, 80/50, 80/70



Tyvek Disposable Pants

- Non-woven high-density polyethylene
- Elastic waist with open bottom pant leg
- Sizes LG & XL



Power Brushes

- Heavy-duty synthetic fiber design
- Heavy-duty wooden handles with metal brackets

Brush

- 18" Curved Edging
- 24" Synthetic Fiber
- 36" Synthetic Fiber
- 48" Synthetic Fiber
- 36" Natural Fiber
- 48" Natural Fiber

Holder

- 3.25" Standard
- 10.5" Heavy Duty

Handle

- 1 1/8" x 72" Universal Handle

Sealcoating Edging Brushes

**7" Masonry Brush**

- Ideal for applying solvents, coatings, and for general cleaning
- 7" brush with 2" natural heat resistant Tampico bristles
- Use outdoors on all surfaces in wet or dry conditions
- Can be used as a handheld brush, or with tapered handle or threaded handle (sold separately)

**Handheld Masonry Brush**

- Wood masonry brush with 4-row, 3" bristles
- 6 1/2" handle, easy to hang and store
- Natural, heat-resistant Tampico bristles
- Use outdoors on wet or dry surfaces

**9 1/2" Masonry Brush**

- Ideal for applying solvents, coatings, and for general cleaning
- 9 1/2" brush with 2" natural heat resistant Tampico bristles
- Use outdoors on all surfaces in wet or dry conditions
- Can be used as a handheld brush, or with tapered handle or threaded handle (sold separately)

Street Brooms

**Synthetic Broom Head**

- The picture you have is fine
- 16" Street Broom
- Ideal for sweeping wet or dry dirt, debris, mulch, or gravel
- Extra stiff sweeping synthetic bristles
- For use with tapered handle or threaded handle (sold separately)

**Natural Fiber Broom Head**

- The picture you have is fine
- Great for outdoor use
- 16" long broom
- All natural India fiber bristles (6 1/4" long)
- For use with tapered handle or threaded handle (sold separately)

**Wire Broom Head**

- 16" broom
- Built to withstand heavy duty cleaning of driveways and parking lots
- 3 3/4" coated steel wire bristles
- For use with tapered handle (sold separately)

**18" Orange Street Broom**

- Heavy duty orange bristle street sweep
- Stiff, coarse, non-sagging, and unbreakable synthetic bristles
- Use under any adverse conditions-dry, wet, oily, or greasy

**Tapered Broom Handle**

- 60" x 1-1/8" Lacquered Wood Handle
- For use with a variety of broom and brush heads

**Threaded Broom Handle**

- 60" x 15/16" Lacquered Wood Handle
- For use with a variety of broom and brush heads



We carry Billy Goat blowers & Grazors!



Wheeled Blowers

- 30% lighter than comparable steel units.
- Rounded composite housings coupled with 16-blade advanced fan technology. This eliminates air voids, reduces noise, and lowers weight.
- No rusting or denting and there is less stress on the engine shaft for longer life.



Hurricane Z3000 Zero Turn Stand-On Blower

- Ideal for large sized maintenance contractors, landscapers, and seal coaters
- Tri-directional blowing options
- Zero-turn maneuverability
- 8,500 CFM coupled with a blower housing design that draws air from both sides



4.0 HP Honda Grazor

- Removes vegetation and other debris from cracks and crevices before laying down crack filler and applying sealant
- Robust construction & balanced platform make cleaning cracks easier
- Rips through ragged cracks and crevices at the rate of five feet every 15 seconds



8" replacement wheel

- Sold as single quantities
- Tight knot steel twisted bristles
- Works on Billy Goat Grazors and Little Wonder crack machines

Asphalt Tools



Lutes & Lute Rakes

Available in 24", 30", & 36" with either a 6' or 7' handle. Can be purchased as both sides smooth or with one side serrated.



Asphalt Edge Tamper

- Shorter and wider blade
- Perfect for shaping edges
- 16" blade length
- Heavier material that lute



Road Rake

- 16 teeth
- 60" lacquered ash handle
- Made in the USA



Asphalt Rake

- 14 3.75" long teeth
- 15.5" level head
- 60" lacquered ash handle
- Made in the USA



Truper Square Point Shovel

- Affordable shovel ideal for "medium duty" use
- 48" North American lacquered, ash handle for strength and durability
- Tempered steel blade for longer life



Welded Iron Tamper

- Steel pipe construction
- Used to flatten dirt, stone, and asphalt
- Available in 8"x8" or 10"x10" with 48" handle

Asphalt Tools



Asphalt Depth Gauge

- Accurately measured the depth of fresh asphalt
- Strong, yet lightweight
- 36" Length



Asphalt Shoes

- Felt shoes allow you to walk on new, hot asphalt without compromising the surface
- Made of heavy-gauge galvanized steel
- No hassle, quick release, adjustable straps: one size fits most



Round Point Shovel

- Ideal for general lawn, construction, and garden work
- Round point has a tempered steel blade suitable for digging, planting, cutting sod, etc.
- 48" lacquered white ash handle gives optimum ratio of resistance and flexibility



Asphalt Checking Straightedge

- Ideal for finding uneven asphalt surfaces
- 3/4" x 4" straightedge with built-in vial to check levels
- High-grade aluminum construction
- 8', 10', 12'



Floor Scraper

- The perfect clean-up tool
- Removes many types of floor coverings from a variety of floors
- Heavy gauge 7" Steel Blade welded to a 48" T-Handle
- Made in the USA



Square Shovel

- 16 gauge, heat treated carbon steel blade
- 42" hardwood handle with clear lacquer finish
- Square shoulder socket and solid steel rivet

Line Stripers



Professional striping contractors choose Graco stripers for dependability, high performance, and quality results. We carry a full line of LineLazer models that can handle any striping job - from straightforward restriping jobs to more complex layout and pattern work applications.



Models

- LineLazer 3400
- LineLazer V 3900 Standard Series
- LineLazer V 3900 HP Automatic Series
- LineLazer V 5900 Standard Series
- LineLazer V 5900 HP Automatic Series
- LineLazer 130HS
- LineLazer V 200HS
- LineLazer V 250 SPS

Options

- Choose between one or two-gun system
- Choose between manual or automatic triggers

Accessories/Tools

- LL 5 Series Spray Tip
- Tip Guard
- Throat Seal Liquid
- 1/4" and 3/8" Hose
- Inlet Strainer
- Paint Hopper Kit
- Glass Bead Dispenser



Graco offers three high performance LineDriver attachments that connect to your LineLazer to double your pavement marking productivity. From traditional gas-powered units to the new electric-powered LineDriver ES, there is a configuration to meet the needs of any professional striping contractor

Models

- LineDriver ES, Four AGM Batteries
- LineDriver, Ride-On System (160 cc Honda GX)
- LineDriver HD, Ride-On System (200cc Honda GX)

Accessories/Tools

- LineDriver Auxiliary Battery Kit
- LineDriver Hitch Kit
- LineDriver Replacement Wheel Kit



Tack Coat

EM-50-TT Trackless Tack Coat (PennDOT Bulletin 15 approved)



Prime Coat

AEP Prime Coat (PennDOT Bulletin approved)



Rubberized Joint Sealing

ASTM D6690 Type 1 (PennDOT Bulletin 15 approved)

Curb and Barrier Sealing

PG64-22 (AC-20) - PennDOT Bulletin 15 approved



Hot Rubberized Crack Filler



For decades, Daniel B. Krieg, Inc. has maintained township roads, commercial parking lots, airports, schools, and highways with top-tier crack-filling services. Our PennDOT approved rubberized crack filler stretches and shrinks with pavement during winter's freeze-thaw cycles, sealing cracks to prevent damage. This powerful treatment extends your pavement's life and saves you from costly repairs.



Sealcoating - Masterseal & Coal Tar



Sealcoating is a vital maintenance step for parking lots, protecting asphalt from damaging UV rays, water, oil spills, and harsh weather, while extending pavement life and enhancing its sleek appearance. At Daniel B Krieg, Inc., we are Pennsylvania's premier sealcoating contractor. Our highly experienced team, the most skilled in the region, brings, decades of expertise to every project, ensuring exceptional results. We use only top-quality materials to provide unmatched protection against environmental wear. From commercial lots to township facilities our commitment to excellence guarantees long-lasting, high-performance surfaces that save you money and boost curb appeal.

Asphalt Rejuvenation



CPR Pavement Rejuvenator™ - Asphalt Rejuvenation is a critical maintenance solution for parking lots, restoring essential oils to aging asphalt to enhance flexibility, prevent cracking, and extend pavement life far beyond traditional sealcoating. Unlike surface-level sealcoat, the CPR™ Rejuvenator we use at Daniel B. Krieg, Inc. penetrates down into the asphalt, revitalizing it from within to resist weathering and heavy traffic.



Equipment**Straw Blower**

- 13 HP electric start
- 6" Outlet
- 25' Discharge hose
- 50" L x 31" W x 53" H
- 520 lbs

Rental Options

- Daily
- Weekly
- Monthly

**MA-10 Melter**

- Can be used without heat for cold pour materials.
- Comes with a 50,000 BTU burner, 10' hose, regulator, striker, and draw-off valve
- Capable of melting and applying 600 lbs of sealant per day
- 10 Gallon capacity

Rental Options

- Daily
- Weekly
- Monthly

**55 Gallon Melter**

- Can provide hot material in 30 minutes or less
- Includes temperature gauge, built in hand agitator, lifting handles, and hinged lid.
- Comes with a 50,000 BTU burner, 10' hose, regulator, striker, and draw-off valve
- Capable of melting up to 1800 lbs. of sealant per day.

Rental Options

- Daily
- Weekly
- Monthly



Contact

Harrisburg

 800.334.4929
717.564.2400

York

 717.792.0284

Follow Us



DBKRIEGINC@AOL.COM



WWW.DBKRIEGINC.COM



@DanielBKriegInc

